




THE ORIGINAL  
ENGINEERED IN AUSTRIA

# TEWE® BALER TWINES

Legendary reliability

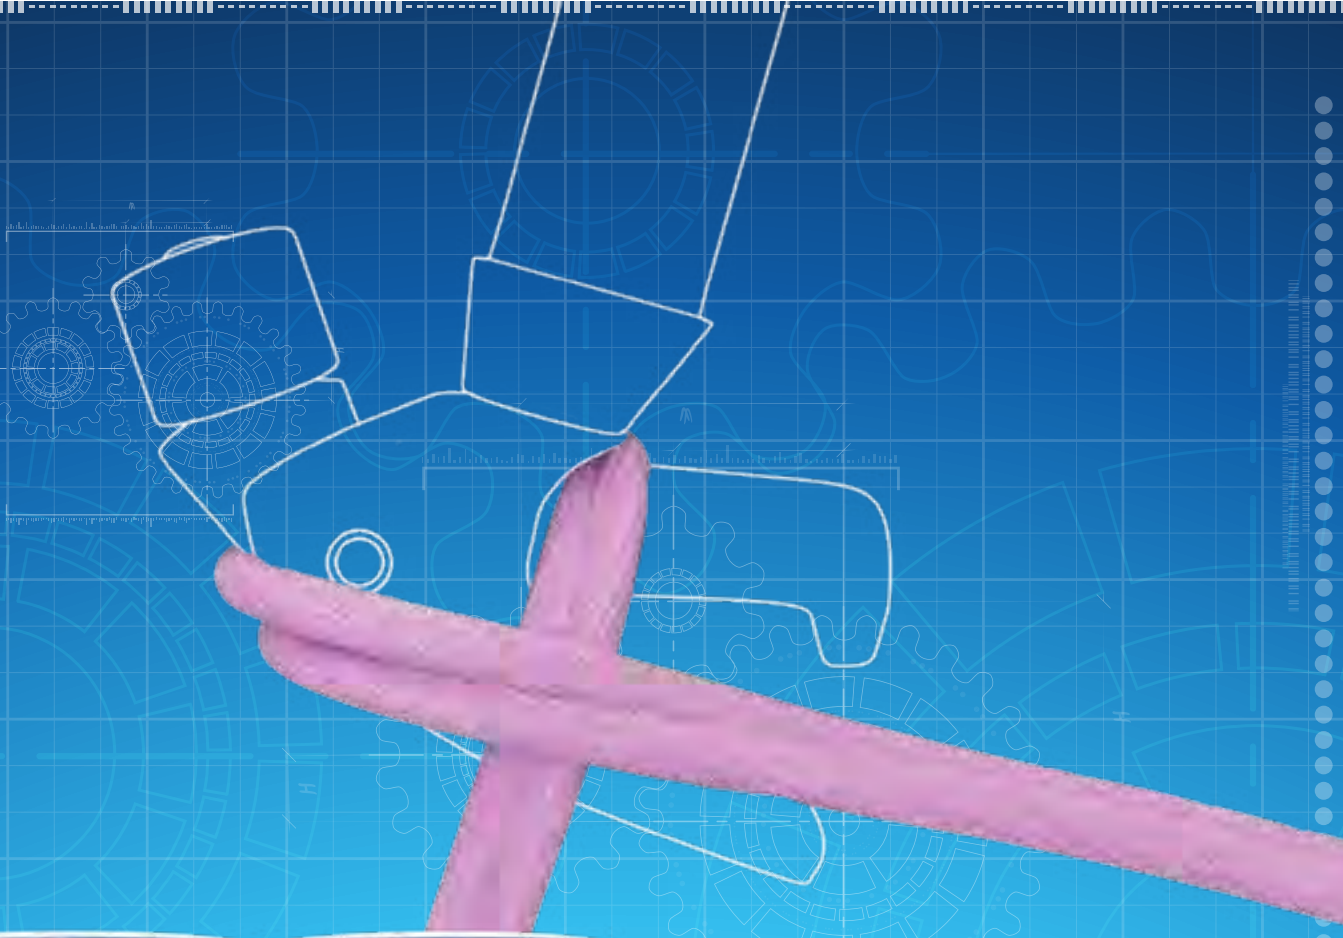

TEWE® for Large Square Bales comes in a range of products designed to suit your needs. Choose the strongest twine for your most demanding conditions, or opt for the longer pack length. Whichever twine you choose, you can count on high performance that will not let you down.

CONDITIONS

EXTREME  
VERY HIGH  
HIGH  
STANDARD  
LOW



**TEWE® AURO**

For High Density balers where ultimate performance is required. Use it for straw in conditions of extreme density or high temperatures, short straw, and corn stalks.



**TEWE® FERRO PLUS, TEWE® HD BLUE, TEWE® HD EXTRA 2600 M**

Suited for conditions of extreme density or high temperatures. Longer pack length provides better cost efficiency. More meters for the same weight—15% longer compared to a standard type 110 twine.



**TEWE® ULTIMAX, TEWE® SIGNAL BIGMAX, TEWE® FERRO HYPERMAX**

The best performing option for all crops and balers where high density is required. Use it for silage and for high density hay and straw bales.



**TEWE® ULTIMAX LONG**

A longer option for standard density hay, straw or silage bales.



**TEWE® ULTIMAX PLUS**

Maximum length for use in all crops and balers where a higher density is not needed.



TEWE® AURO  
TEWE® HD EXTRA

**FIRST-CLASS TWINES FOR HIGH DENSITY BALERS**

TEWE® Auro

**TEWE® Auro. For High Density balers where ultimate performance is required.** Use it for straw in conditions of extreme density or high temperatures, short straw, and corn stalks

**TEWE® Auro offers you:**

- Best performance in HD balers
- Reliability for problematic crop
- Compact and flexible
- Fits in every baler



Weight per spool/pack	10 kg / 20 kg
Av.Linear breaking strength	410 kg
Colour	Beige
Pack Length	2020 m

TEWE® HD Extra

**TEWE® High Density Extra** has the maximum run length for High Density balers, now also in the special HD performance segment. State-of-the-art production and raw material technologies maximize bale performance per spool even at very high press density.

**TEWE® High Density Extra offers you:**

- More power & running length for HD balers
- Reduces down-time and costs
- Optimized for double knotters



Weight per spool/pack	11 kg / 22 kg
Av.Linear breaking strength	380 kg
Colour	Blue
Pack Length	2600 m





TEWE® FERRO PLUS  
TEWE® FERRO HYPERMAX

## FIRST-CLASS TWINES FOR LARGE SQUARE BALERS

### TEWE® FERRO PLUS

**TEWE® FERRO PLUS** is the Big Spool version with increased strength of the Type Ferro Hypermax.

**TEWE® FERRO PLUS offers you:**

- Big spool size for less downtime
- Upgraded strength for heavy bales
- Perfect for Cormick single knotting system



Weight per spool/pack	11 kg / 22 kg
Av.Linear breaking strength	400 kg
Colour	Rust
Pack Length	2266 m

### TEWE® 130 FERRO HYPERMAX

**TEWE® 130 Ferro Hypermax** has been the best and the most well known twine, for professional end users, twine on the market for years. Even under the most challenging conditions you can rely on TEWE® Ferro Hypermax.

**TEWE® 130 FERRO Hypermax offers you:**

- The reference of performance for contractors
- Compactness and flexibility
- Reliable in all conditions
- Perfect fit for all single knotter systems



Weight per spool/pack	9 kg / 18 kg
Av.Linear breaking strength	355 kg
Colour	Rust
Pack Length	1908 m



TEWE® SIGNAL BIGMAX  
TEWE® ULTIMAX

## FIRST-CLASS TWINES FOR LARGE SQUARE BALERS

### TEWE® SIGNAL BIGMAX

**This twine is the reliable and legendary classic.** Brought to perfection in many years of development. Reliable and strong. The twine that gets more out of your baler.

**TEWE® 130 Signal Bigmax offers you:**

- Reliable legendary classic
- Ideal knotting capacity
- High density bales
- Perfect for all double knotting systems



Weight per spool/pack	9 kg / 18 kg
Av.Linear breaking strength	355 kg
Colour	Violet
Pack Length	1908 m

### TEWE® ULTIMAX 2600

**TEWE® ULTIMAX** – the ultimate twine! Longer like type 150 with knot and strength performance of type 130, it is the perfect combination of both types. ULTIMAX gives you around 780 bales more in straw, and around 1060 bales more in silage per pallet. This saves you time, effort and work!

**TEWE® Ultimax offers you:**

- Superb knot performance
- Full performance with all knotting systems
- Delivers top results, even when exposed to great heat and large amounts of dirt
- Less cost per bale due to significant increase of strength and yield



Weight per spool/pack	9,3 kg / 18,6 kg
Performance	Like type 130
Colour	Violet
Pack Length	2600





TEWE® 350  
TEWE® 400  
TEWE® 500

## TWINES FOR CONVENTIONAL AND ROUND BALERS

### TEWE® 350

**Excellently suitable** for high pressure baling as an alternative to Sisal twines. Our customers appreciate this twine with older balers instead of Sisal twines.

#### TEWE® 350 offers you:

- High to very high knotting strength
- More resistance against mechanical influence
- For heavy square bales



Weight per spool/pack	5 kg / 10 kg
Av. Linear breaking strength	145 kg
Colour	Blue
Pack Length	2900 m

### TEWE® 400

**With our type 400 twine** we've proven for 40 years that high quality saves both time and worry in the field. Suited for all kinds of high pressure balers.

#### TEWE® 400 offers you:

- High tensile strength
- High knotting strength
- High bale density



Weight per spool/pack	5 kg / 10 kg
Av. Linear breaking strength	120 kg
Colour	Blue
Pack Length	3500 m

### TEWE® 500

**TEWE® 500 twine** is "universal" because it can be used for conventional balers, or as twine for round balers, or as twine for binding purposes in wine growing.

#### TEWE® 500 offers you:

- Ideal tensile strength
- Good knotting strength
- When used for round bales, permits maximum bale densities



Weight per spool/pack	5 kg / 10 kg
Av. Linear breaking strength	100 kg
Colour	Blue
Pack Length	3950 m

TEWE® 750 & 750+  
TEWE® 1000 & 1000+

## TWINES FOR ROUND BALERS



### TEWE® 750 or TEWE® 750+

**Reliable, tight and regular bales**, that's what you'll get with TEWE® 750.

The tensile strength values as well as the structure of the twine ensure the compactness and adhesion you need to avoid nasty surprises during baling and loading.

**TEWE 750+** is the latest and most technically advanced version with more meters per pack, enabling you to bale longer with less cost.

#### TEWE® 750 and TEWE® 750+ offer you:

- Very good tensile strength
- Top bale adhesion
- Perfect bale shape
- Maximum bale density
- Operating efficiency
- High running consistency

#### TEWE® 750

Weight per spool/pack	5 kg / 10 kg
Av. Linear breaking strength	71 kg
Colour	Blue
Pack Length	5800 m

#### TEWE® 750+

Weight per spool/pack	4 kg / 8 kg
Av. Linear breaking strength	69 kg
Colour	Blue
Pack Length	7920 m



### TEWE® 1000 or TEWE® 1000+

**The type TEWE® 1000** is recommended for round balers at normal pressure. If the round bales are loaded less frequently, or if you focus more on operating efficiency, then TEWE® 1000 will be your perfect solution.

**TEWE 1000+** is the latest and most technically advanced version with more meters per pack, enabling you to bale longer with less cost.

The ultimate economical solution for round baler twine!

#### TEWE® 1000 and TEWE® 1000+ offer you:

- High tensile strength
- Very good operating efficiency

#### TEWE® 1000

Weight per spool/pack	5 kg / 10 kg
Av. Linear breaking strength	49 kg
Colour	Blue
Pack Length	8280 m

#### TEWE® 1000+

Weight per spool/pack	5.5 kg / 11 kg
Av. Linear breaking strength	47 kg
Colour	Blue
Pack Length	11660 m





## TEWE® PRODUCT LIST

Type	Pack length	Colour	Packs per pallet	Weight per spool/ pack	Pallets per truck	
TEWE® Auro	2,020 m	beige	56	10 kg / 20 kg	21	
TEWE® HD Extra	2,600 m	blue	40	11 kg / 22 kg	22	
TEWE® HD Blue	2,160 m	blue	56	10 kg / 20 kg	21	
TEWE® Ferro Plus	2,266 m	rust	48	11 kg / 22 kg	22	
TEWE® Ferro Hypermax	1,908 m	rust	56	9 kg / 18 kg	22	
TEWE® Signal Bigmax	1,908 m	violet	56	9 kg / 18 kg	22	
TEWE® ULTIMAX	2,600 m	violet	56	9.3 kg / 18.6 kg	22	
TEWE® ULTIMAX LONG	3,000 m	violet	56	10 kg / 20 kg	22	
TEWE® ULTIMAX PLUS	3,200 m	violet	56	9.5 kg / 19 kg	22	
TEWE® 350	2,900 m	blue	80	5 kg / 10 kg	28	
TEWE® 400	3,500 m	blue	80	5 kg / 10 kg	28	
TEWE® 500	3,950 m	blue	80	5 kg / 10 kg	28	
TEWE® 750	5,800 m	blue	80	5 kg / 10 kg	28	
TEWE® 750+	7,920 m	blue	96	4 kg / 8 kg	20	
TEWE® 1000	8,280 m	blue	80	5 kg / 10 kg	28	
TEWE® 1000+	11,660 m	blue	80	5.5 kg / 11 kg	26	

**WARNING:** The use of these products may be hazardous. Never use our products for purposes other than those they were designed for. Customers must ensure that all persons using these products are familiar with their correct use and the related necessary safety precautions. Please bear in mind that any of these products can cause harm, when used incorrectly or overstrained.



**Tama CE GmbH**

An den Loddenbüschen 81a, D-48155 Münster, Germany

Tel: +49 251 280 580, Fax: +49 251 280 58 50

vertrieb@tama-ce.de, www.tama-ce.de

